


Short pitch precision roller chain (A series)

双排滚子链/套筒链 Duplex roller chains & bush chains

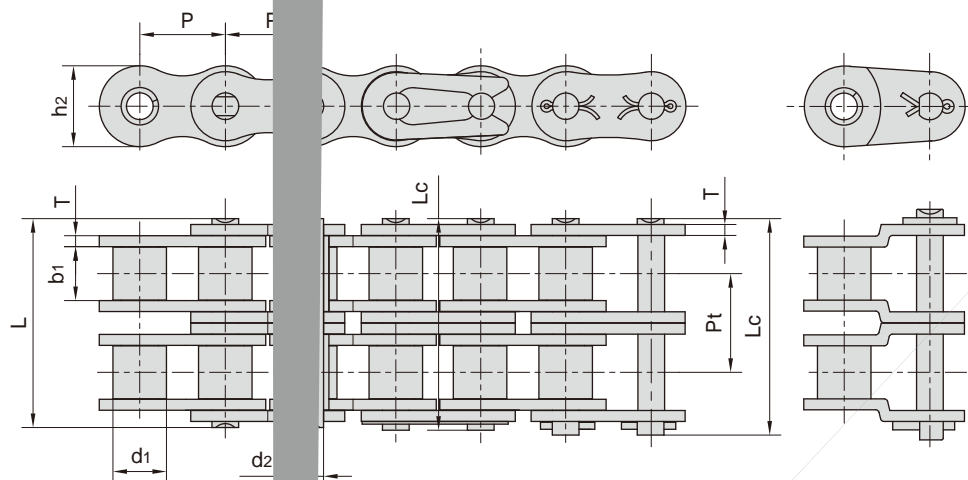

ISO/ANSI/ DIN 链号	东华 链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter		销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	排距 Transverse pitch	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米长重 Weight per meter
					d2 max	L max	Lc max	h2 max						
ISO/ANSI/ DIN Chain No.	Donghua Chain No.	P mm	d1 max mm	b1 min mm	d2 max mm	L max mm	Lc max mm	h2 max mm	T max mm	Pt mm	Q min kN/lbf	Q0 kN	q kg/m	
*25-2	*04C-2	6.350	3.30	3.18	3.31	14.5	15.0	6.00	0.80	6.40	7.00/1591	10.0	0.28	
*35-2	*06C-2	9.525	5.08	4.77	5.58	22.5	23.3	9.00	1.30	10.13	15.80/3591	22.3	0.63	
41-2	085-2	12.700	7.77	6.25	7.58	25.7	26.9	9.91	1.30	11.95	13.34/3032	16.9	0.81	
40-2	08A-2	12.700	7.95	7.85	7.96	31.0	32.2	12.00	1.50	14.38	28.20/6409	37.2	1.12	
50-2	10A-2	15.875	10.16	9.40	10.08	38.9	40.4	15.09	2.03	18.11	44.40/10091	62.6	2.00	
60-2	12A-2	19.050	11.91	12.57	11.94	48.8	50.5	18.00	2.42	22.78	63.60/14455	86.4	2.92	
80-2	16A-2	25.400	15.88	15.75	15.92	62.7	64.3	24.00	3.25	29.29	113.40/25773	148.6	5.15	
100-2	20A-2	31.750	19.05	18.90	19.53	76.4	80.5	30.00	4.00	35.76	177.00/40227	215.2	7.80	
120-2	24A-2	38.100	22.23	25.22	22.10	95.8	99.7	35.70	4.80	45.44	254.00/57727	326.2	11.70	
140-2	28A-2	44.450	25.40	25.22	25.70	103.3	107.9	41.00	5.60	48.87	344.80/78364	445.0	15.14	
160-2	32A-2	50.800	28.58	31.55	28.27	123.3	128.1	47.80	6.40	58.55	453.60/103091	533.8	20.14	
180-2	36A-2	57.150	35.71	35.48	35.46	138.6	144.4	53.60	7.20	65.84	560.50/127386	722.2	29.22	
200-2	40A-2	63.500	39.68	37.85	39.85	151.9	158.8	60.00	8.00	71.55	707.60/160818	933.6	32.24	
240-2	48A-2	76.200	47.63	47.35	48.81	183.4	190.8	72.39	9.50	87.83	1020.60/213955	1343.2	45.23	

*套筒链：表中滚子直径d1为套筒直径

*Bush chain: d1 in the table indicates the external diameter of the bush

